



MCU – Simplex Feedback

Domestic Hot Water & Process



**maxi
therm**
beyond steam™

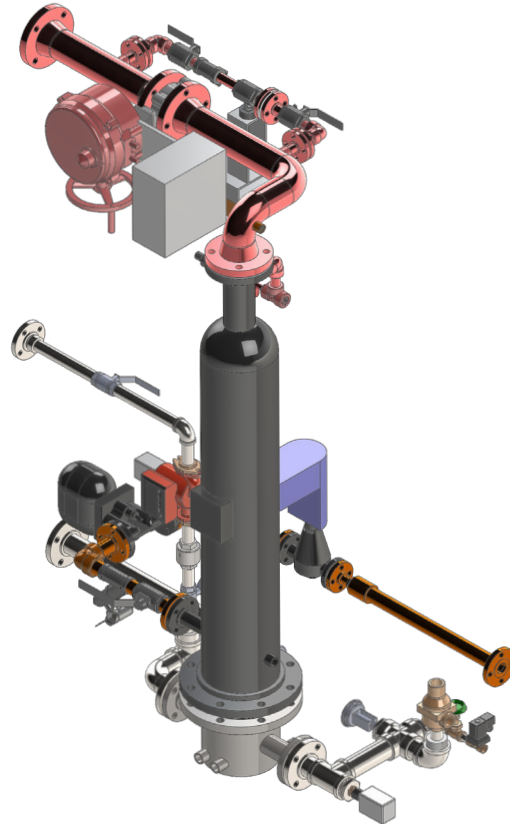

Features

- One vertical flooded U-tube heat exchanger
- Condensate control valve with subcooling condensate return below 200°F, resulting in a 0% flash return system
- Automatic steam start-up and shut-off valve
- Total install costs will be 20% less than any other method
- NEMA 4 control panel with an advanced programmable controller, graphic HMI display including BACnet, Lon, Modbus compatibility and remote access
- 5% to 8% energy savings and reduced carbon footprint
- Liquid stability set point at 2°F

*Trademarks are owned by Maxi-Therm Inc.




1508 O Street SW #101
Auburn, WA 98001
PH:425.483.5613
sales@controlfactors.com

MCU – Simplex Feedback

Technical Diagram

U.S. PATENT #6,857,467 B2
CAN. PATENT #2,416,353

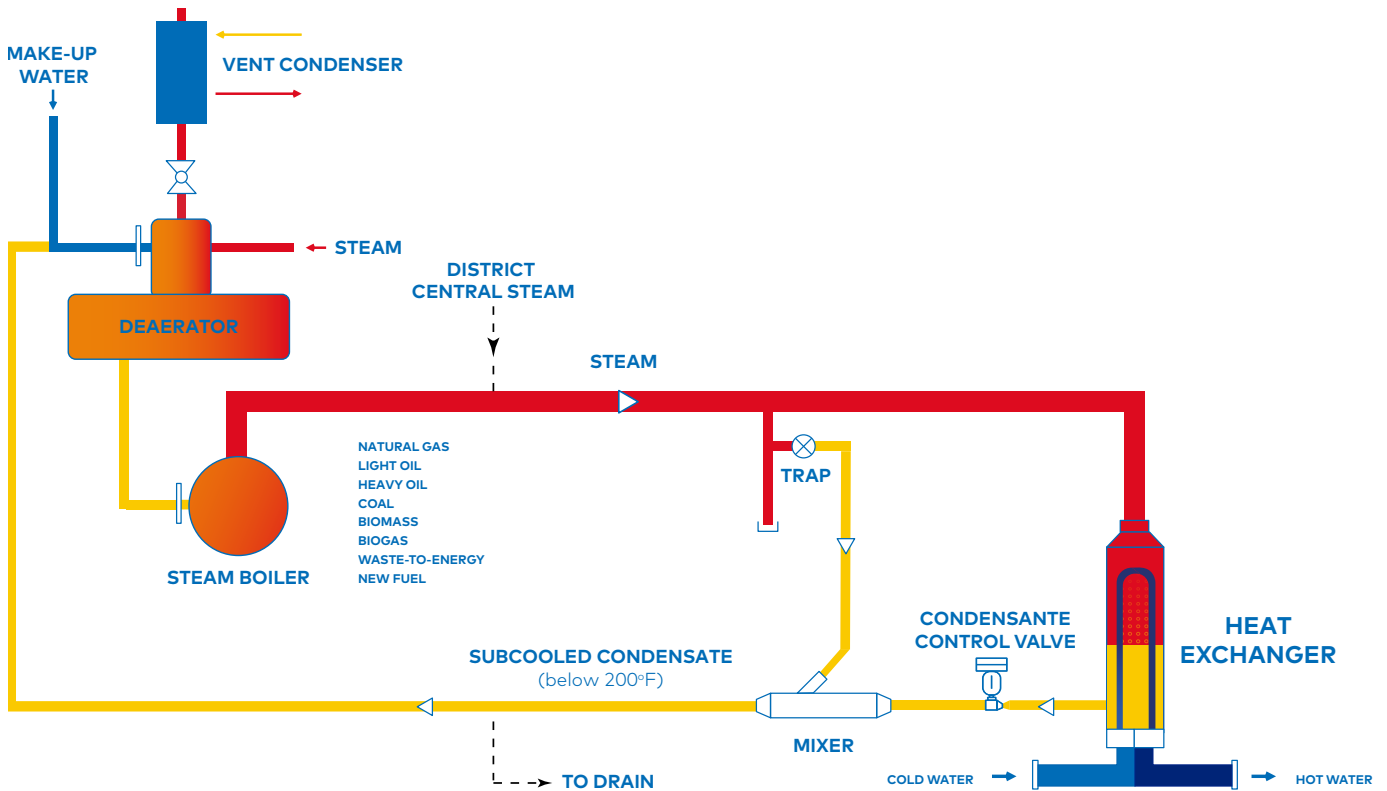

All Maxi-Therm basic designs do not require:

- Steam pressure reducing station and no steam safety valve to roof
- Condensate return pump station
- Flash tank
- Steam vents to roof

*Trademarks are owned by Maxi-Therm Inc.



1508 O Street SW #101
Auburn, WA 98001
PH:425.483.5613
sales@controlfactors.com